



CLUX-DVI2SDIA

DVI to 3G SDI Converter



Operation Manual

DISCLAIMERS

The information in this manual has been carefully checked and is believed to be accurate. Cypress Technology assumes no responsibility for any infringements of patents or other rights of third parties which may result from its use.

Cypress Technology assumes no responsibility for any inaccuracies that may be contained in this document. Cypress also makes no commitment to update or to keep current the information contained in this document.

Cypress Technology reserves the right to make improvements to this document and/or product at any time and without notice.

COPYRIGHT NOTICE

No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or any of its part translated into any language or computer file, in any form or by any means—electronic, mechanical, magnetic, optical, chemical, manual, or otherwise—without express written permission and consent from Cypress Technology.

© Copyright 2011 by Cypress Technology.

All Rights Reserved.

Version 1.1 August 2011

TRADEMARK ACKNOWLEDGMENTS

All products or service names mentioned in this document may be trademarks of the companies with which they are associated.





SAFETY PRECAUTIONS

Please read all instructions before attempting to unpack, install or operate this equipment and before connecting the power supply.

Please keep the following in mind as you unpack and install this equipment:

- Always follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
- To prevent fire or shock hazard, do not expose the unit to rain, moisture or install this product near water.
- Never spill liquid of any kind on or into this product.
- Never push an object of any kind into this product through any openings or empty slots in the unit, as you may damage parts inside the unit.
- Do not attach the power supply cabling to building surfaces.
- Use only the supplied power supply unit (PSU). Do not use the PSU if it is damaged.
- Do not allow anything to rest on the power cabling or allow any weight to be placed upon it or any person walk on it.
- To protect the unit from overheating, do not block any vents or openings in the unit housing that provide ventilation and allow for sufficient space for air to circulate around the unit.

REVISION HISTORY

VERSION NO.	DATE DDMMYY	SUMMARY OF CHANGE
VS1	23/02/12	First release
VS2	11/07/12	SDI standards updated
VR3	03/08/12	DVI supports 480i@59.94



CONTENTS

1. Introduction	1
2. Applications	1
3. Package Contents	1
4. System Requirements	1
5. Features	1
6. Operation Controls And Functions	2
6.1 Front Panel.....	2
6.2 Rear Panel.....	3
7. Connection Diagram	4
8. Specifications	5
9. Acronyms	6





1. INTRODUCTION

The DVI to SDI Converter allows DVI-D signals to be shown on SDI display while ensuring high bit rates of 2.970 Gbit/s to give you high resolution signal without any loss. For professionals this means that it is now easier to convert your high definition DVI signal with audio to SDI for long distance transmission and display your work on SDI display. In addition, the external audio input allows the user to insert the sound from a different audio source instead of the DVI embedded audio, and send to the SDI output.

2. APPLICATIONS

- PC/HD signal sending to SDI display
- DVI signal conversion to 3G-SDI display

3. PACKAGE CONTENTS

- DVI to 3G-SDI Converter
- 5 V/2.6 A DC Power Adaptor
- Operation Manual

4. SYSTEM REQUIREMENTS

Input DVI source equipment with DVI cable and output SDI monitor with SDI cable.

5. FEATURES


- Shows DVI source on SDI display
- SDI interface operates at bitrates of 2.970 Gbit/s, 2.970/1.001 Gbit/s, 1.485 Gbit/s, 1.485/1.001 Gbit/s and 270 Mb/s
- Converts DVI signals to SDI:
 1. 480i/576i to SD-SDI (SMPTE 259M-C, at bitrates of 270 Mbit/s)
 2. 720p/1080i to HD-SDI (SMPTE 292M, at bitrates of 1.485 Gbit/s or 1.485/1.001 Gbit/s)
 3. 1080p to 3G-SDI (SMPTE 424M/425M-AB, at bitrates of 2.970 Gbit/s and 2.970/1.001 Gbit/s)

- Supports DVI input timings: 480i@59.94, 576i, 720p@50/59.94/60, 1080i@50/59.94/60, 1080p@23.98/24/25/29.97/30/50/59.94/60
- Supports SDI output distance up to 100 meters (3G-SDI), 200 meters (HD-SDI), or 300 meters (SD-SDI)

Note: Tested with Belden 1694A Cable. Operating distances may vary if used with cables of different specifications.


6. OPERATION CONTROLS AND FUNCTIONS

6.1 Front Panel

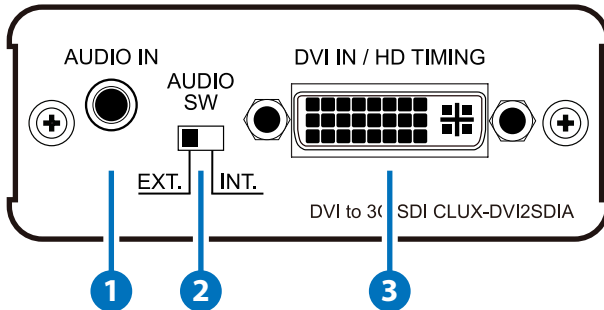


- 1 AUDIO IN:** Connect to the audio source equipment (such as DVD player) with a 3.5mm phone jack for audio signal input.
- 2 AUDIO SW:** This switch allows the user to choose between audio sources. Switch between the external (EXT) audio input (3.5mm phone jack) or the internal (INT) audio from an HDMI to DVI adaptor input.
- 3 DVI IN/HD TIMING:** Connect to the DVI input source such as a PC or laptop with a DVI cable or with a HDMI cable and HDMI to DVI adaptor.

6.2 Rear Panel

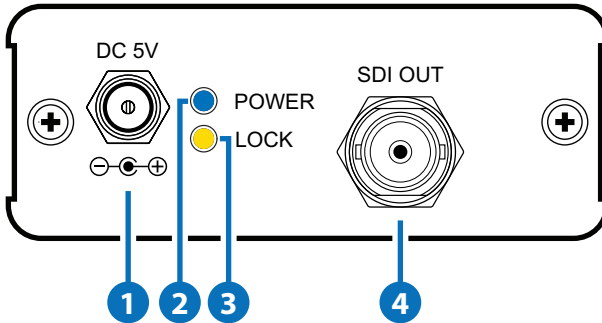

- 1 DC 5V:** Plug the 5V DC power supply into the unit and connect the adaptor to AC wall outlet.
- 2 POWER LED:** This blue LED will illuminate when the device is connected to the power supply.
- 3 LOCK LED:** This yellow LED will illuminate when both input source and SDI output display has successfully sent and received the signal.
- 4 SDI OUT:** Connect to the SDI output display.

7. CONNECTION DIAGRAM

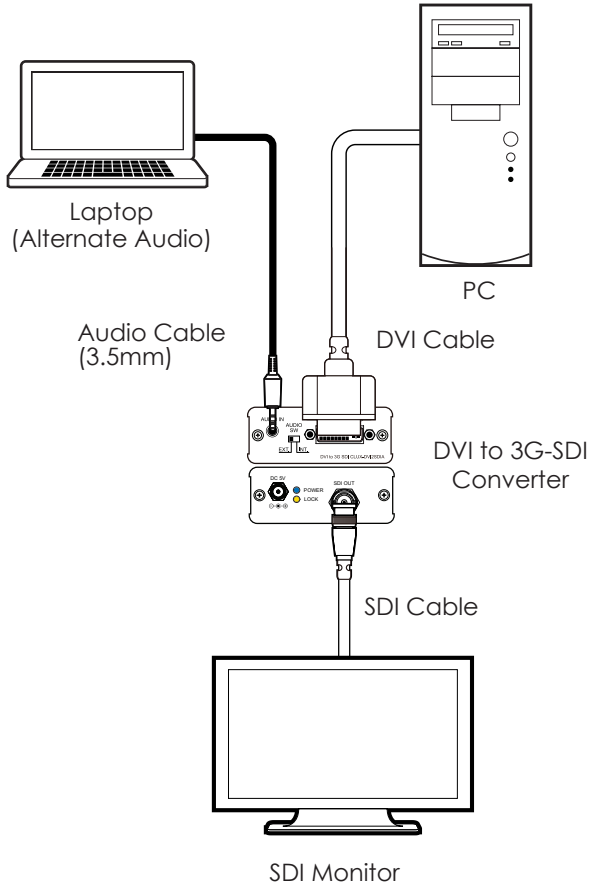



8. SPECIFICATIONS

Video Bandwidth	225 MHz/6.75Gbps
Input	1×DVI, 1×3.5 mm Phone Jack
Output	1×BNC (SD/HD/3G-SDI)
DVI Timing Support	480i@59.94, 576i, 720p@50/59.94/60 1080i@50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60
SDI Timing Support	SD-SDI: SMPTE 259M-C, 270 Mbit/s HD-SDI: SMPTE 292M, 1.485 & 1.485/1.001 Gbit/s 3G-SDI: SMPTE 424M/425M-AB, 2.970 & 2.970/1.001 Gbit/s
Audio Input Support	Internal: PCM 2/5.1/7.1 CH External: Analog 2 CH
ESD Protection	Human-body Model: ±8kV (Air-gap discharge) ±4kV (Contact discharge)
Power Supply	5V/2.6A DC (US/EU standards, CE/FCC/ UL certified)
SDI Cable Distance	3G/HD/3G-SDI up to 100/200/300 meters with BELDEN 1694A Cable
Dimensions	78.5 mm (W)×124 mm (D)×30 mm (H)
Weight	204 g
Chassis Material	Aluminum
Silkscreen Colour	Silver
Operating Temperature	0 °C~40 °C/32 °F~104 °F
Storage Temperature	-20 °C~60 °C/-4 °F~140 °F
Relative Humidity	20~90% RH (non-condensing)
Power Consumption	4.3 W

Note: SDI supports SD resolutions of 480i@59.94 and 576i@50 only. If the input source is sending an incompatible resolution, this may cause problems with the image or no image to be displayed. Please ensure that the source device is set to output in a compatible resolution.

9. ACRONYMS

ACRONYM	COMPLETE TERM
3G	Bandwidth 2.94Gbps \approx 3G
SDI	Serial Digital Interface



CYPRESS TECHNOLOGY CO., LTD

Home page: <http://www.cypress.com.tw>