
10" Band Pass Subwoofer for Installation Applications (White)



- 300 Watts continuous,1,200 Watts peak power
- High excursion 10" low frequency driver with inside/outside wound coil
- Low distortion dual port design for maximum sound pressure level
- 15 mm (5/s") birch plywood enclosure with hard wearing semi matt white paint finish
- Integral M10 rigging points for ease of installation
- Neutrik speakON* NL4 and barrier strip connectors
- 3-Year Warranty Program*
- Designed and engineered in England



The 1,200-Watt TCS110B-WH is a high performance 10" subwoofer system designed for a wide range of speech and music sound reinforcement applications. Engineered to work in conjunction with TURBOSOUND loudspeaker management systems, the TCS110B-WH provides extended low frequency performance from a compact enclosure.



A dual port design enclosure, the TCS110B-WH features an extremely powerful, high excursion 10" low frequency driver with a specialised voice coil wound on both the inside and outside of the coil former for higher magnetic density, heat dissipation, higher power handling capacity, and improved efficiency. The TCS110B-WH provides fast and accurate transient response for virtually distortion-free operation – even in your most demanding performances.

Finished in a highly durable semi matt white paint, the cabinet is constructed from 15 mm (%") birch plywood with integral M10 threaded rigging points. The rear panel connector plate carries Neutrik speakON* NL4 and barrier strip connectors for input and link connections to additional enclosures.



ATHENS TCS110B-WH

10" Band Pass Subwoofer for Installation Applications (White)




You Are Covered

We always strive to provide the best possible Customer Experience. Our products are made in our own MUSIC Group factory using state-of-the-art automation, enhanced production workflows and quality assurance labs with the most sophisticated test equipment available in the world. As a result, we have one of the lowest product failure rates in the industry, and we confidently back it up with a generous 3-Year Warranty program.




10" Band Pass Subwoofer for Installation Applications (White)

Frequency Response Sensitivity 1 W / 1 m

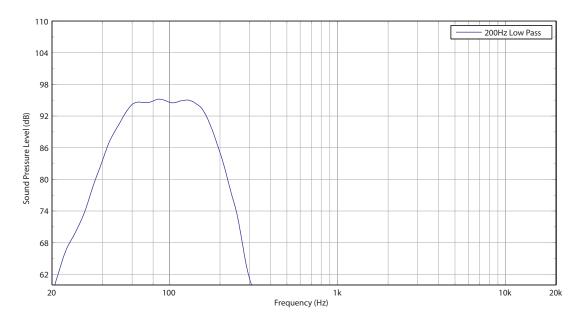


Impedance

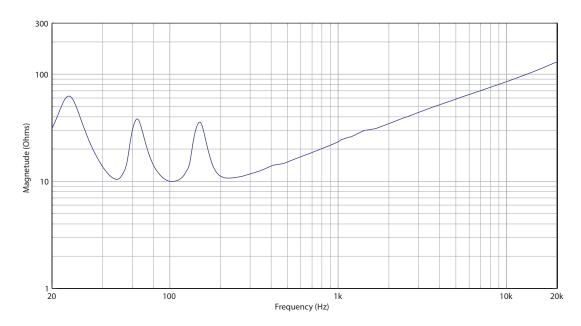



10" Band Pass Subwoofer for Installation Applications (White)

Dimensions

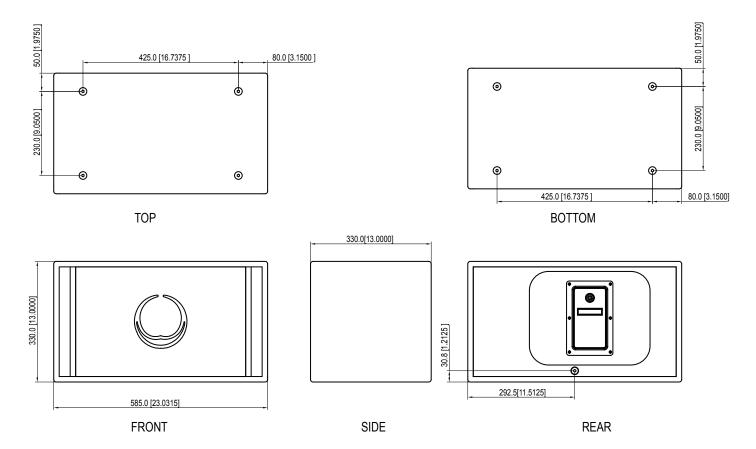



10" Band Pass Subwoofer for Installation Applications (White)

Technical Specifications

System	
Frequency Response	50 Hz - 150 Hz ±3 dB
	40 Hz - 200 Hz -10 dB
Nominal Dispersion	Half spacee
Power Handling (IEC)	300 W continuous, 1200 W peak
Sensitivity	94 dB (1 W @ 1 m)
Maximum SPL	119 dB continuous, 125 dB peak
Impedance	8 Ω
Components	1 x 10" (262 mm) LF driver

Enclosure	
Connectors	1 x Neutrik speakON* NL4, 1 x barrier strip terminals
Wiring Parallel / No switch	Pins 1+ / 1- input, pins 2+ / 2- link
Discrete	_
Dimensions HWD	330 x 585 x330 mm (13.0 x 23.0 x 13.0")
Net Weight	15.8 kg (34.8 lbs)
Construction	15 mm (5%") birch plywood
Finish	Semi matt white paint
Grille	Powder-coated perforated steel
Flying Hardware	M10 x 8



ATHENS TCS110B-WH

10" Band Pass Subwoofer for Installation Applications (White)


Architecture & Engineering Specifications

The speaker shall be of the passive subwoofer type consisting of one 10" (262 mm) LF driver. Performance specifications of a typical production unit shall meet or exceed the following: frequency response, measured with swept sine wave input, shall be flat within ±3 dB from 50 Hz to 150 Hz and within -10 dB from 40 Hz to 200 Hz. Nominal dispersion shall be "half space." Nominal impedance shall be 8 Ohms. Power handling shall be 300 Watts continuous, 1,200 Watts peak. Sensitivity, measured on axis, mean averaged over stated bandwidth, shall be 94 dB, 1 Watt @ 1 metre. Maximum SPL (peak), measured at 1 metre with music program at stated amplifier input, shall be 125 dB. Dimensions: 330 mm high x 585 mm wide x 330 mm deep (13.0" x 23.0" x 13.0"). Net weight: 15.8 kg (34.8 lbs). The loudspeaker system shall be the TURBOSOUND TCS110B-WH. No other loudspeaker shall be acceptable unless submitted data from an independent test laboratory verifies that the above combined performance / size specifications are equaled or exceeded.



ATHENS TCS110B-WH

10" Band Pass Subwoofer for Installation Applications (White)

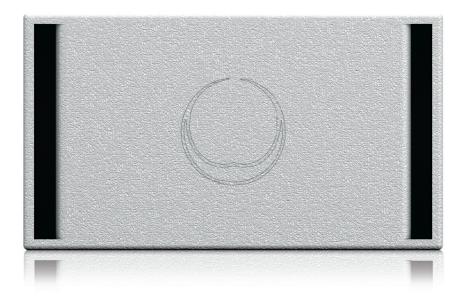





10" Band Pass Subwoofer for Installation Applications (White)








ATHENS TCS110B-WH

10" Band Pass Subwoofer for Installation Applications (White)

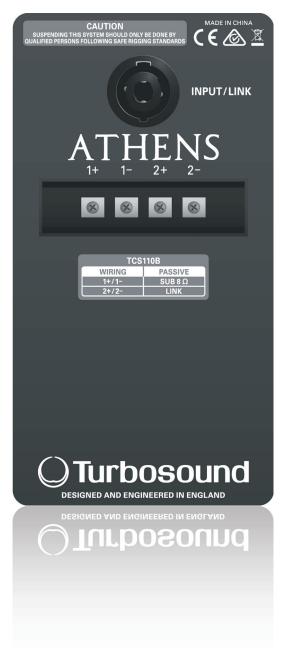



Europe MUSIC Group Services UK Tel: +44 156 273 2290 Email: CARE@music-group.com USA/Canada MUSIC Group Services NV Inc. Tel: +1702 800 8290 Email: CARE@music-group.com

Japan MUSIC Group Services JP K.K. Tel: +81 3 6231 0454 Email: CARE@music-group.com

