

CH-1106TX & RXN

HDMI to CAT6 Transmitter
& Receiver with
IR return control

Operation Manual



CH-1106TX & RXN

• **Disclaimers**

The information in this manual has been carefully checked and is believed to be accurate. Cypress Technology assumes no responsibility for any infringements of patents or other rights of third parties which may result from its use.

Cypress Technology assumes no responsibility for any inaccuracies that may be contained in this document. Cypress also makes no commitment to update or to keep current the information contained in this document.

Cypress Technology reserves the right to make improvements to this document and/or product at any time and without notice.

• **Copyright Notice**

No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or any of its part translated into any language or computer file, in any form or by any means - electronic, mechanical, magnetic, optical, chemical, manual, or otherwise - without express written permission and consent from Cypress Technology.

© Copyright 2013 by Cypress Technology.

All Rights Reserved.

Version 1.0 January 2013

• **Trademark Acknowledgments**

All products or service names mentioned in this document may be trademarks of the companies with which they are associated.

• **Safety Precautions**

Please read all instructions before attempting to unpack or install or operate this equipment, and before connecting the power supply. Please keep the following in mind as you unpack and install this equipment:

- Always follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
- To prevent fire or shock hazard, do not expose the unit to rain, moisture or install this product near water.
- Never spill liquid of any kind on or into this product.
- Never push an object of any kind into this product through module openings or empty slots, as you may damage parts.
- Do not attach the power supply cabling to building surfaces.
- Do not allow anything to rest on the power cabling or allow it to be abused by persons walking on it.
- To protect the equipment from overheating, do not block the slots and openings in the module housing that provide ventilation.

• **Revision History**

<i>Version No</i>	<i>Date</i>	<i>Summary of Change</i>
<i>RDV1</i>	<i>20130110</i>	<i>Preliminary Release</i>

Table of Contents

1. Introduction	1
2. Applications	1
3. Package Contents	1
4. System Requirements	1
5. Features	2
6. Specifications	3
7. Operation Controls and Functions	4
7.1 Front Panel	4
7.2 Rear Panel	5
8. Pin Assignment	6
8.1 IR Cable Pin Assignment	6
8.2 RJ-45 Pin Definitions	6
10. Connection and Installation	7
11. Acronyms	9

1. Introduction

The HDMI transmitter and receiver over CAT6 is the ideal device to send your HDMI signals over long distances. Instead of using expensive HDMI cables, your existing CAT6 cables/sockets can replace HDMI cables while performing the same functions like transferring video and lossless compressed (Dolby TrueHD, Dolby Digital Plus and DTS-HD Master Audio) digital audio. Moreover, you can use the existing remote to control the source and connect it to another transmitter and receiver to extend your HDMI signal to distances you never thought possible. This HDMI Transmitter and receiver is your only choice when looking for an HDMI extender.

2. Applications

- Showroom display/control
- Home entertainment systems
- Commercial displays
- Lecture room display/control

3. Package Contents

- HDMI Transmitter x 1
- HDMI Receiver x 1
- IR Receiver x 1
- IR Blaster x 1
- 5V DC power supply adaptor x 2
- Operation Manual x 1

4. System Requirements

HDMI input source equipment, output HDMI displayer, two CAT6 cables and source equipment's remote control.

5. Features

- HDMI, HDCP 1.1 and DVI 1.0 compliant
- Supports digital video formats and new lossless compressed (Dolby TrueHD, Dolby Digital Plus and DTS-HD Master Audio) digital audio
- Supports CAT6 cables for data/DDC transmission
- Equalizes and recovers any incoming TMDS data before re-transmitting it in flawless quality regardless of the incoming signal
- HDMI cable distance testing showed with 1080p/8bits resolution the Input/Output distance can reach up to 6/10 meters away. With CAT6 cable, distance test with 1080p/8bits resolution the I/O source can run up to 45m away

Note:


- A. Cable tested with CAT6/23AWG/Solid, using cables of another type may result in a different operating distance.
 - B. Cable distance tested with the following: PS3 40G, 37" Philips 8 bit LCD TV
 - C. Figures provided in this manual are for reference only, actual performance may depend on the source and display used along with the type of cable.
- Supports CEC bypass and xvYCC
 - Includes an IR Receiver and Blaster
 - Supports wide range of IR frequencies from 30~50KHz
 - Can be connected to another transmitter and receiver to extend an HDMI signal to an extreme distance

6. Specifications

Transmitter	1 x HDMI 1 x IR Blaster 1 x CAT6 Output Video 1 x CAT6 Output DDC
Receiver	1 x HDMI 1 x IR Receiver 1 x CAT6 Input for Video, 1 x CAT6 Input for DDC
HDMI Input Cable	1080p 8-bit (6M)
HDMI Output Cable	1080p 8-bit (10M)
CAT6 Cable	1080p 8-bit (45M)
Power Supply	5V/1A (US/EU standards, CE/FCC/UL certified) (US/EU standards, CE/FCC/UL certified)
ESD Protection	Human body model: $\pm 8\text{kV}$ (air-gap discharge) $\pm 4\text{kV}$ (contact discharge)
Dimensions (mm)	78.5(W) x 117(D) x 30(H) / Transmitter 78.5(W) x 72(D) x 30(H) / Receiver
Weight(g)	200 / Transmitter 140 / Receiver
Chassis Material	Aluminum
Silkscreen Color	Silver
Operating Temperature	0°C ~ 40°C / 32°F ~ 104°F
Storage Temperature	-20°C ~ 60°C / -4°F ~ 140°F
Power Consumption	2.7W/TX, 3.2W/RX
Relative Humidity	20 ~ 90% RH (non-condensing)


7. Operation Controls and Functions

7.1 Front Panel

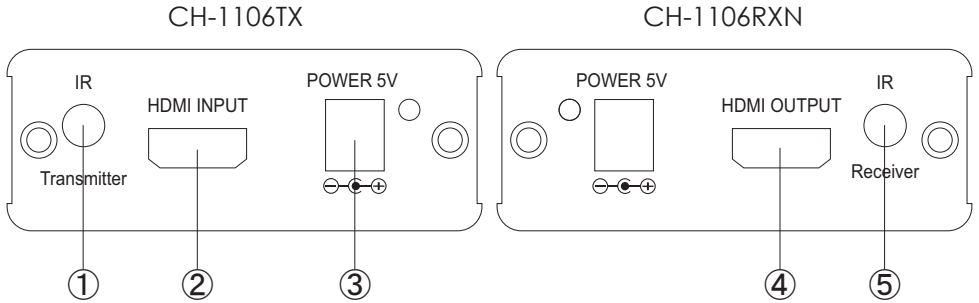


- ① IR Transmitter: This slot is where you connect the IR blaster cable. Place the IR eye in front of the source equipment(s) in order to send an IR signal, the IR blaster has a frequency range from 30KHz to 50KHz.
- ② HDMI INPUT: This slot is where you connect the HDMI or DVI output port of your source equipment such as DVD/Blu-ray players or set-top-boxes with an HDMI cable or receiver unit, you may also connect this device to another unit from the same family or some other type of splitter to further extend an HDMI signal.

Example:

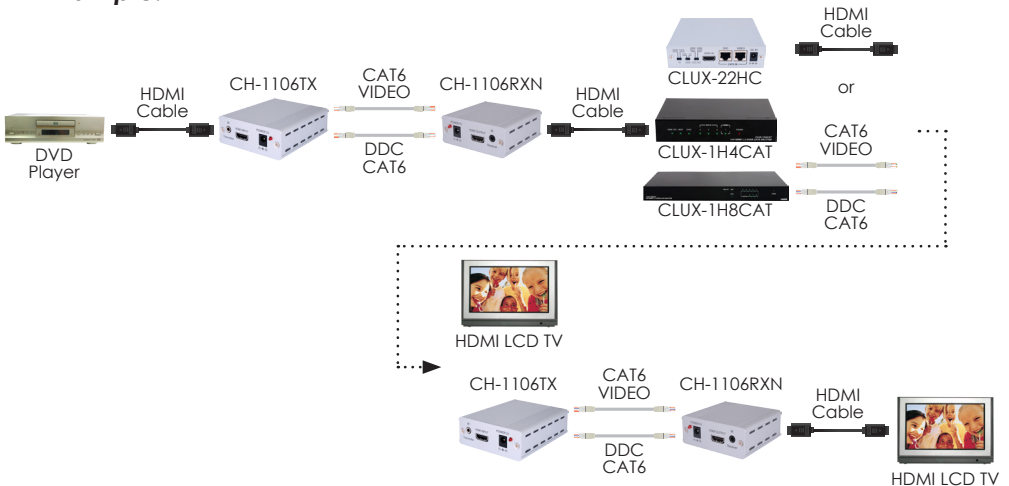


- ③ Power: This slot is where you plug the 5V DC power supply into the unit and connect the adaptor to an AC outlet.
- ④ HDMI OUTPUT: This slot is where you connect the HDMI or DVI input port of your display such as HDTV's or HD monitors or you can connect this device to another unit from the same family or some other type of splitter to further extend an HDMI signal.

Example:

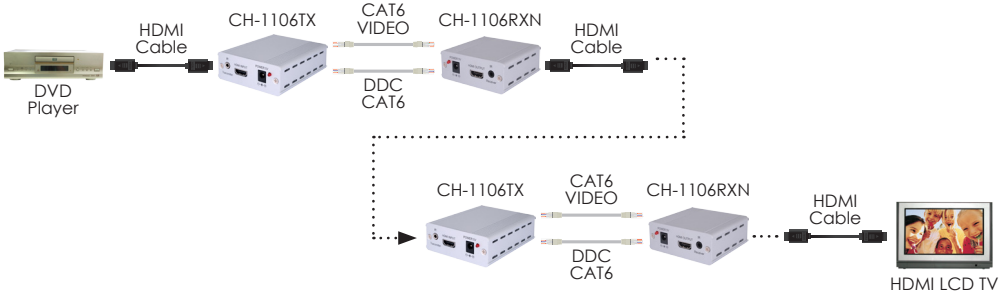

- ⑤ IR Receiver: This slot is where you connect the IR receiver cable, place the IR eye in front of the display then use the existing remote to control the input source equipment. The IR receiver has a frequency range from 30KHz to 50KHz.


7.2 Rear Panel

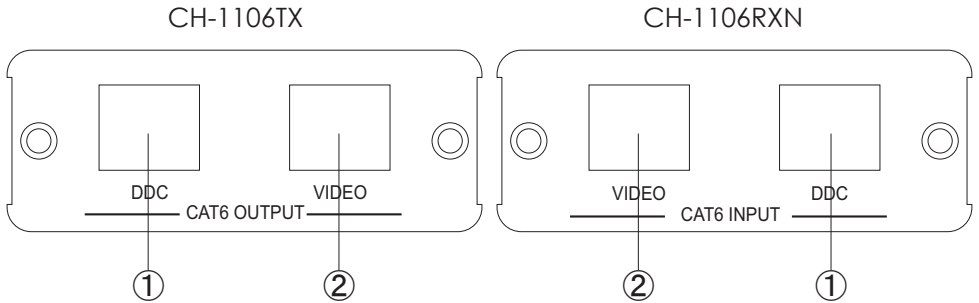

- ① DDC input/output: Connect the DDC output transmitter to the DDC input of the receiver using a CAT6 cable.
- ② Video input/output: Connect the video output of the transmitter to the video input of the receiver using a CAT6 cable.

8. Pin Assignment

8.1 IR Cable Pin Assignment

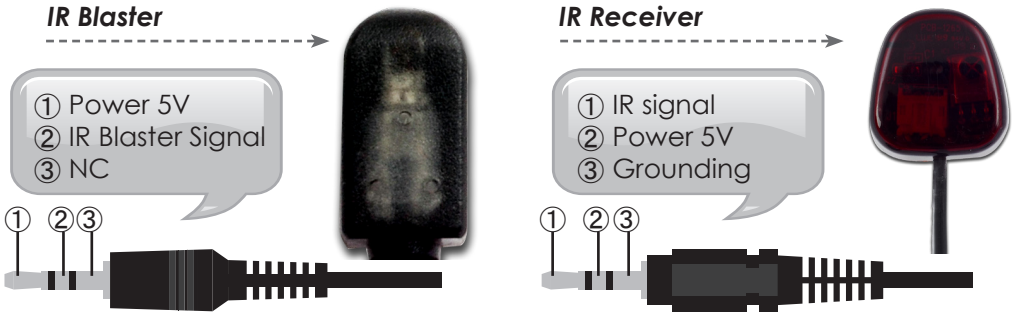




8.2 RJ-45 Pin Definition

Pin	Video	DDC
1	TMDS2+	SCL
2	TMDS2-	N/A
3	TMDS1+	SDA
4	TMDS1-	Power 5V
5	TMDS0+	GND
6	TMDS0-	IR
7	TMDSC+	HPD
8	TMDSC-	CEC

10. Connection and Installation




A

CH-106RXN / CH-1106RXN

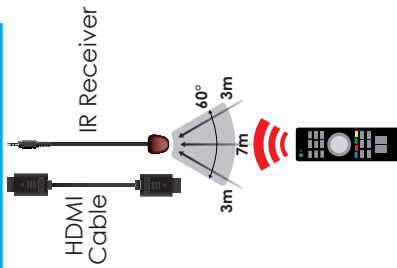

B

CLUX-1CAT4H / CLUX-1CAT8H

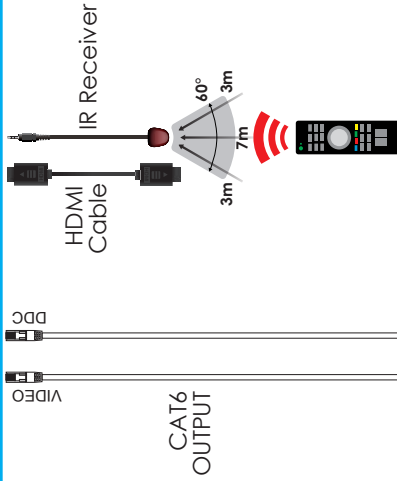




C

CLUX-22HC





A or B or C

CH-106TXN /
CH-1106TX



A or B or C

CLUX-1H4CAT
CLUX-1H8CAT

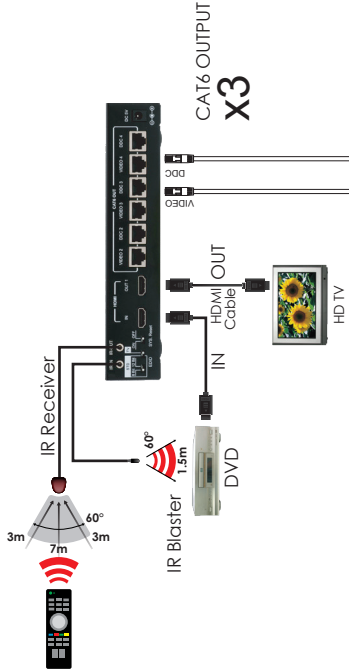


A or B or C

CLUX-22HC



CH-106TXN
CH-1106TX
CLUX-1H4CAT
CLUX-1H8CAT
CMLUX-4H4CAT
CLUX-22HC

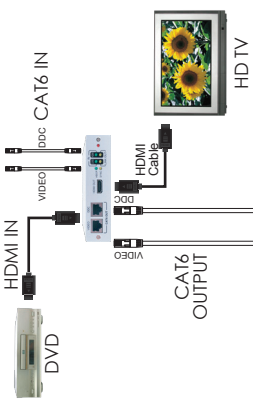

A or B or C

Acronyms



Acronym

Complete Term

CAT6	Category 6 cable
DVI	Digital Visual Interface
ESD	Electrostatic Discharge
GND	Ground
HDCP	High-Bandwidth Digital Content Protection
HDMI	High-Definition Multimedia Interface
IR	Infrared



CYPRESS TECHNOLOGY CO., LTD.

Home page: <http://www.cypress.com.tw>

20130116 MPM-CH1106TXRXN