




Bel Canto C1

Specification

Frequency response	90Hz-20KHz
Directivity angle	H120°x V120°
Long-term power(RMS)	200W
Peak Power Handling	400W/5Min
Impedance	8 ohms
Sensitivity	95dB (2.83/m)
Maximum SPL	115dB
Connection	2×NL 4 Speakon
Enclosure Construction	Aluminium
Cabinet Surface Treatment	Black Painting
Dimensions(H×W×D)	506×107.7×111.8mm
Low	3 IN×4(100mm)
Mid,HF (Neodymium)	1.3 IN×1(26.5mm)
N.W.	5.2kg


Install Size:

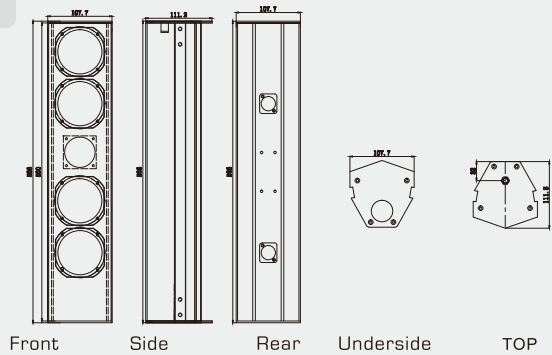

Specification

Frequency response	48Hz-250Hz
Directivity angle	-----
Long-term power(RMS)	400W
Peak Power Handling	800W/5min
Impedance	8 ohms
Sensitivity	93dB(2.83V/m)
Maximum SPL	114dB
Connection	2×NL 4 Speakon
Enclosure Construction	18-Birch Plywood
Cabinet Surface Treatment	Black Catalyzed Polyurethane Paint
Dimensions(H×W×D)	450×400×500mm
Low	12 IN×1(310 mm)
High	-----
N.W.	27.5 Kg
Power	220V/ 50Hz-60Hz

Install Size:

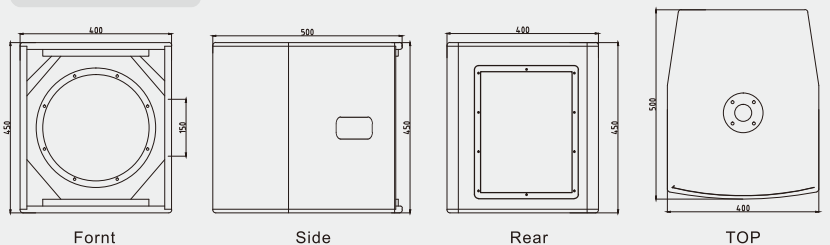

Bel Canto C1 SUB

RIGGING



Bel Canto C1 wall bracket



**Professional
Amplifier**
3ch-digital with DSP
400W+400W+900W



Bel Canto C1 SUB

 **Bluetooth**

