





Key Features

- Module based design for wide range in/out request
- Module hot swappable
- Preview 4 inputs
- Seamless switching between PST and PGM
- Support NDI decoding
- Multiple audio outputs available
- Streaming via USB 3.0 output module and mobile phone
- 2 video layers plus additional layers for OSD, LOGO, STILL
- Mask for foreground layer including support for user defined mask
- Compatible with all kinds of Digital Displays
- Genlock Y In
- Multiple Presets and savable to the external USB disk
- 14 Transition Effects on the T-bar and TAKE button
- PTZ VISCA control compatible

Application

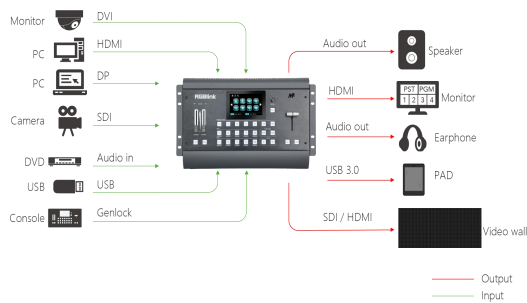

Dimensions

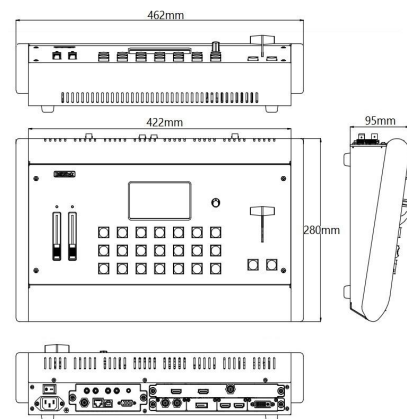

Order Codes

Product Code	Item
220-0001-01-0	M1
220-0001-02-0	M1 HDMI
220-0001-03-0	M1 DVI
220-0001-03-0-15	M1 (HDMI+SDI)
290-0001-01-0	Output Module PGM HDMI/SDI PVW HDMI
290-0001-02-0	Output Module PGM HDMI PVW HDMI (Standard)
290-0001-03-0	Output Module PGM HDMI/SDI/USB 3.0 PVW HDMI
290-0001-05-0	Output Module PGM HDMI/USB 3.0 PVW HDMI
290-0001-06-0	USB 3.0 Output Module without SDI Interface

Product Code	Item
290-0001-07-0	USB 3.0 Output Module with SDI Interface
290-0001-10-0	Single NDI Input Module
190-0001-04-2	Single DVI Input Module
190-0001-07-2	Single 3G-SDI Input/Loop Module
190-0001-10-2	Single USB 2.0 Input/Backup Module
190-0001-13-2	Single HDMI Input Module
290-0001-09-0	MONE EXT MB Suite
980-0001-02-2	EXT Module

- * 1. M1 HDMI: Standard with quad HDMI input and output modules
 2. M1 DVI: Standard with quad DVI input and HDMI output modules
 3. M1(HDMI+SDI): Standard with dual HDMI & dual SDI input and HDMI output module
 4. Input module with single port needs to be used with EXT module; single EXT module can support up to four single -port input modules
 5. Single NDI input module needs to be used with MONE EXT MB Suite

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink
www.rgblink.com



Specification

Connectors	Input	1 slots up to 4 single inputs , select from		
		DVI Module	1×DVI-I (compatible with DVI/VGA/YPbPr/CVBS)	
		HDMI Module	1×HDMI-A	
		SDI Module	2×BNC (1 In 1 Loop)	
		USB Module	2×USB (1 In 1 backup)	
		NDI Module	1×RJ 45	
	Output	1 slot,select from		
		With SDI	2×HDMI-A 1×BNC	
		Without SDI	2×HDMI-A	
		With USB 3.0/SDI	2×HDMI-A 1×BNC 1×USB-A	
		With USB 3.0 without SDI	2×HDMI-A 1×USB-A	
	Audio	IN L/R	2×RCA	
		OUT L/R	2×RCA	
		OUT	1×3.5mm Stero Jack	
	Communication	LAN	1×RJ 45	
		Tally	1×DB15	
		USB	1×USB-B	
		Genlock Y	1×BNC	
	Power		1×IEC	
Performance	Input Resolutions	SDI SMPTE 480i 576i 720p@50/60 1080i@59.94/60 1080p@23.98/24/25/29.97/30/59/59.94/60 DVI HDMI SMPTE 480i 576i 720p@50/59.94/60 1080i@50/59.94/60 1080p@50/59.94/60 VESA 800×600@60 1024×768@60 1280×720@60 1280×800@60 1280×960@60 1280×1024@60 1400×1050@60 1600×1200@60 1920×1080@60 NDI 720p@25/30/50/60 1080p@25/30/50/60		
	Output Resolutions	Select from below or customized SDI SMPTE 480i 576i 720p@50/59.94/60 1080i@50/59.94/60 1080p@50/59.94/60 HDMI SMPTE 720p @50/59.94/60 1080p@50/59.94/60 VESA 1024×768@60 1280×720@60 1280×1024@60 1360×768@60 1920×1080@60 USB 3.0 (follow HDMI) 1024×768@60 1280×720@60 1280×1024@60 1360×768@60 1920×1080@60		
	Supported Standards	SDI SMPTE 425M (Level A & B) SMPTE 424M SMPTE 292M SMPTE 259M-C DVB-ASI HDMI 1.3 DVI Single Link NDI NDI Hx USB 3.0		
Features	Layers	2		
	MASK Edit	Support		
	Brightness	Standard range		
	EDID Management	Yes		
Power	Input Voltage	AC 85V-264V, 50/60Hz		
	Max Power	120W		
Enviroment	Temperature	0– 55°C		
	Humidity	10% - 90%		
Physical	Weight	Net	5.5g	
		Package	8kg	
	Dimensions	Net	462mm×280mm×95mm	
		Package	585mm×410mm×205mm	

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink[®]
www.rgbink.com

